



Solutionsky Co., Ltd.

<http://www.solutionsky.com>

CCTV Camera

SKY-VI30K-70



SKY-DBJ30-70



■ Features

- ◆ Weatherproof IR Camera
- ◆ SONY Exview HAD CCD II (ICX672/3AKA)
- ◆ 42,36,72 pcs \varnothing 5mm IR-LED, IR Range 35,30,50 M
- ◆ OSD/2D-DNR/BLC/MD/Privacy Masking
- ◆ 3-Axis Design, easy for installation




SKY-VI50T-70



*Effio-E + 673 CCD With OSD
OSD Button in the cable*



■ Size Chart

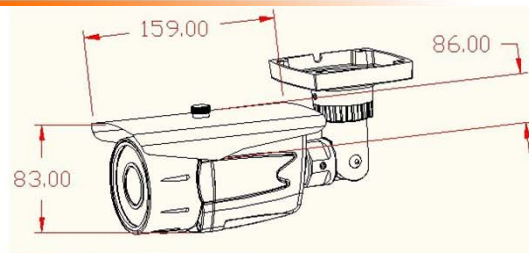

■ Specifications

Model Name	SKY-VI30K-70 , SKY-DBJ30-70 , SKY-VI50T-70
Image Device	1/3" Exview HAD CCD II (ICX672/3AKA)
DSP Device	Effio-E (CXD4127GG,CXD4816GG)
Resolution	Color Mode: 650TVL; B/W Mode:700TVL
Picture Elements	PAL:976(H)x582(V) NTSC:976(H)x494(V)
IR Led & IR Range	42,36,72pcs \varnothing 5 IR Led; 35,30,50M IR Distance
Min. Illumination	0.001 Lux (F2.0)/ 0 Lux IR On
Lens Furnished	Built-in 4--9mm Manual Zoom Lens (2.8--12mm Optional)
TV System	PAL/NTSC
Electronic Shutter	NTSC:1/60~1/100,000, PAL:1/50~1/110,000
S/N Ratio	More than 52dB
Gamma	0.45
Exposure	Auto
Shuter/ AGC	Auto/Manual
White Balance	ATW / User1/User2
Backlight	OFF/ON/BLC/ HLC
Pict Adjust	Mirror/Brightness/Contrast/Sharpness/Hue/Gain
ATR	ON/OFF
Motion Det	OFF/ON(Detect sense/ Area Sel)
Peivacy Masking	OFF/ON (4 Zone)
Day/Nigh	True Day and Night (Auto/ Day / Night / Ext. D&N)
2D-NR	OFF/ON (Y/C level)
Camera ID	OFF/ON
Sync. System	Internal
Waterproofing Criterion	IP 66
Video Output	1 Vp-p / 75 Ohms
Power Supply	DC12V \pm 10%
Operation Temperature	-10 $^{\circ}$ C ~ +50 $^{\circ}$ C RH95% Max
Dimension	Body : \varnothing 83x159mm With Bracket: 230(L)x86(W)x83(H)
Weight	1400g

Design and specifications are subject to change without notice.